



Top up Cavity Walls

Wall Insulation

Celotex
SAINT-GOBAIN

IMPORTANT: On 1 September 2017, Celotex took the precautionary measure to temporarily suspend the supply of Celotex FR5000, Celotex CG5000, Celotex CF5000 and Celotex SL5000 while we investigate the results of recent tests (Parts 6 and 7 of British Standard 476). In addition, we have recently identified a compliance issue relating to our calculation and testing of the declared lambda value of products in the 4000 and 5000 ranges and the Crown-Bond and Crown-Fix products within the Crown Flat Roofing range. Due to this issue, the suspension of the 5000 range will continue and now includes the FI5000 and GD5000 products. Materials relating to the 5000 range products are for information only. Please note that PL4000 manufactured after 15 December 2017 will be marketed from January as Celotex PL3000 with a declared lambda value of 0.023 W/mK. To read the full statement please visit the Celotex website homepage.


Introduction

Celotex is the brand leading manufacturer of PIR insulation boards, with its range encompassing the thinnest and thickest boards available to the construction industry today. All of the Company's products are manufactured at its plant in Suffolk, from where the dedicated Celotex Technical Centre offers advice and calculations for compliance with current regulations and legislation.

Celotex: We know insulation inside and out.

Use **Celotex PL4000** thermal laminate as a top up grade to existing cavity walls to deliver the following benefits:

- Upgrading existing walls to current Building Regulation compliance levels
- Suitable for multiple installation techniques
- Provides a vapour control layer when board joints are taped and jointed
- Provides reliable long term energy savings for buildings
- Tapered edge plasterboard offers the installer maximum installation flexibility and speed

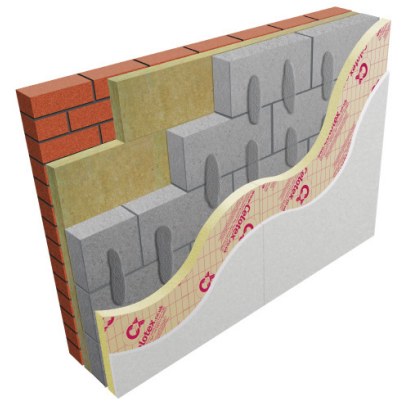

Celotex PL4000

Celotex PL4000 Technical Data

Product Code	Thickness (mm)	Combined R-value (m ² K/W)	Weight (kg/m ²)
PL4015	15 + 12.5	0.70	8.78
PL4025	25 + 12.5	1.20	9.06
PL4040	40 + 12.5	1.85	9.52
PL4050	50 + 12.5	2.30	9.86
PL4060	60 + 12.5	2.75	10.15

Sustainable Insulation

Celotex PIR insulation has been independently assessed by BRE Global and has been accredited with an A+ rating when compared to the BRE Green Guide.

The results also show that Celotex offers a lower environmental impact than other typical PIR manufacturers.

For further information about Celotex' sustainable insulation solutions, visit the sustainability pages of the website at celotex.co.uk



For premium performance Celotex GD5000 is suitable for this application.

cont...



Top up Cavity Walls

Wall Insulation

Celotex
SAINT-GOBAIN

Example U-value Calculation: Top up Cavity Walls

Construction		50mm clear cavity	50mm cavity filled with mineral wool insulated to 0.60 (W/m ² K)	Existing cavity wall insulated to 0.45 (W/m ² K) (1995 regulations)	Existing cavity wall insulated to 0.35 (W/m ² K) (2002 regulations)
Outside surface resistance		-	-	-	-
Brickwork		-	-	-	-
Cavity		-	-	-	-
Blockwork dense		100	100	100	100
Plaster dabs cavity		15	15	15	15
Variable layer		See below	See below	See below	See below
Board joints sealed to form VCL		-	-	-	-
Variable Layer	Thickness (mm)	U-value (W/m ² K)	U-value (W/m ² K)	U-value (W/m ² K)	U-value (W/m ² K)
Celotex PL4000	15 + 12.5	-	-	-	0.27
Celotex PL4000	25 + 12.5	-	0.33	0.28	0.24
Celotex PL4000	40 + 12.5	-	0.27	0.23	0.20
Celotex PL4000	50 + 12.5	-	0.24	0.21	0.19
Celotex PL4000	60 + 12.5	0.29	0.22	0.19	0.17

Installation Guidelines for Celotex PL4000

Installation guidelines for internal lining systems using dot and dab

- Ensure that existing walls are permeable. Strip any gloss paint or vinyl wallpaper.
- Use the Celotex Insulation Saw to cut the 1200mm x 2400mm Celotex PL4000 boards to fit the floor-to-ceiling height of the room.
- Ensure a continuous seal at skirting, ceiling level and at openings by applying a continuous band of gypsum adhesive. Gypsum adhesive at perimeter edges can be replaced with thin timber battens.
- Apply further dabs of gypsum adhesive. This should be in accordance with the adhesive manufacturer's instructions.
- Align sheets against the dabs and secure into correct position.
- Once the dabs are set, it is recommended that additional secondary fixings be applied to the Celotex PL4000. Exact fixing details should be in accordance with the recommendations of the fixing manufacturer.
- Joints between the boards must be tightly butted, taped and jointed using appropriate tape and jointing material to create the vapour control layer (VCL).
- Line window and door reveals with thinner Celotex PL4000 boards to reduce the risk of thermal bridging. Fix a batten around the edge of the opening and scribe the board to fit the reveal. Cut the dry lining to suit and mechanically fix into the masonry reveal using proprietary fixings. Finish using an angle fillet at the frame and an angle bead or scrim tape at external corners.
- Please note that to avoid the load being directly applied to the Celotex PL4000, suitable mechanical fixings should be used for other internal fittings. Advice on suitable fixings should be sought directly from the fixing manufacturer.

cont...



Top up Cavity Walls

Wall Insulation

Celotex
SAINT-GOBAIN

Installation guidelines for internal lining systems using mechanical fixings

- Ensure that existing walls are permeable. Strip any gloss paint or vinyl wallpaper.
- Use the Celotex Insulation Saw to cut the 1200mm x 2400mm Celotex PL4000 boards to fit the floor-to-ceiling height of the room.
- Secure Celotex PL4000 with suitable mechanical fixings. Fixing details should be in accordance with the fixing manufacturer's instructions.
- Joints between the boards must be tightly butted, taped and jointed using appropriate tape and jointing material to create the vapour control layer (VCL).
- Line window and door reveals with thinner Celotex PL4000 boards to reduce the risk of thermal bridging. Fix a batten around the edge of the opening and scribe the board to fit the reveal. Cut the dry lining to suit and mechanically fix into the masonry reveal using proprietary fixings. Finish using an angle fillet at the frame and an angle bead or scrim tape at external corners.

Installation guidelines for internal lining systems using mechanical fixings to timber battens

- Ensure that existing walls are permeable. Strip any gloss paint or vinyl wallpaper.
- Fix treated softwood timber battens to the masonry. They should be set out a maximum of 600mm vertical centres to coincide with the edges of the boards. As a minimum requirement, horizontal battens should be used to support the top and bottom of the board edges.
- Secure Celotex PL4000 with suitable mechanical fixings. Fixing details should be in accordance with the fixing manufacturer's instructions.
- Joints between the boards should be tightly butted and finished by taping and jointing using appropriate tape and jointing material to create the VCL.

Installation guidelines for internal lining systems using mechanical fixings to metal lining systems

- Celotex PL4000 boards can be fixed to a number of proprietary metal frame lining systems. The system should be fixed in accordance with the manufacturer's instructions.

Further Information

If you wish to contact Celotex, please visit celotex.co.uk and click on the 'contact us' page.

For information regarding [storage, installation and handling](#) of Celotex products, or for [Health and Safety](#) advice, please refer to the 'literature' pages of the website at celotex.co.uk

Celotex has a policy of continuous product development and reserves the right to alter product designs or specifications without prior notice.